

LiFePO4 Battery Specification

Model: TB12125F-SC-M108B



Modified Record

1. / General Information

This specification defines the performance of rechargeable LiFePO4 battery pack TB12125F-SC-M108B manufactured by SHENZHEN TOPBAND BATTERY CO.,LTD, describes the type, performance, technical characteristics, warning and caution of the battery pack.

2. / Battery Specification (@ 25±5°C)

NO	Items		Characteristics
2.1	Normal capacity		125Ah
2.2	Nominal energy		1.6KWh
2.3	Nominal voltage		12.8V (LFP-4S5P)
2.4	Internal resistance		≤20mΩ @1kHz AC
2.5	Normal charge voltage		14.6±0.5V
2.6	Float charge voltage(for Standby use)		13.8±0.2V
2.7	Allowed MAX charge current		80A
2.8	Recommended charge current		≤50A
2.9	Allowed MAX discharge current		80A 350A/3S
2.10	End of discharge voltage		8.0V
2.11	Dimension		Length 318±2mm
			Width 165±2mm
			Height 215±2mm
2.12	Weight (No accessories)		About:15Kg
2.13	Operation temperature	Charge	0~45°C
		Discharge	-20~60°C
2.14	Self-discharge rate	Residual capacity	≤3%/Month ; ≤15%/ year
		Recover capacity	≤1.5%/Month ; ≤8%/ year
2.15	Storage environment	≤1month	-20~+60°C、5~75%RH
		≥3month	-10~+45°C、5~75%RH
		Recommend environment	15~35°C、5~75%RH
2.16	Series parallel application		up to 4 series-connected applications

3. Electrical Characteristics & Test Condition

Testing Conditions: Ambient Temperature: $25\pm5^{\circ}\text{C}$ Huminity: 45%~75%.

Normal charge: Charge battery under CC(0.33C)/CV(14.6V) mode until over charge protection or the charge current reduce to 0.05C, and then rest for 1h.

NO	Items	Criterion		Condition
3.1	Normal Capacity	125Ah		After Normal charge, discharge @0.33C current to the end of discharge voltage.
3.2	Internal Impedance	$\leq 20\text{m}\Omega$		@50% SOC @1kHz AC internal resistance test instrument.
3.3	Short circuit protection	Auto cutoff load when short circuit		Connect the positive and negative of this battery pack through a lead with 0.1Ω resistance.
3.4	Cycle life @DOD100%	≥ 2000 cycles		After Normal charge, discharge @0.33C current to the end of discharge voltage. Repeat above process until discharge capacity reduce to 60% of initial value.
3.5	Discharge temperature characteristic @0.33C	-20°C(6h)	$\geq 70\%$	$\frac{\text{Capacity @ specified temperature}}{\text{Capacity @ } 25^{\circ}\text{C}}$ the percentage accord with criterion
		0°C(6h)	$\geq 80\%$	
		25°C(4h)	$\geq 100\%$	
		55°C(4h)	$\geq 95\%$	
3.6	Capacity retention rate	remain capacity $\geq 96\%$		After normal charge, store the battery @ $25\pm5^{\circ}\text{C}$ for 28days, then discharge capacity @0.33C, the retention capacity accord with criterion.

4. Circuit Protection


The batteries are supplied with a LiFePO4 Battery Management System (BMS) that can monitor and optimized each single prismatic cell during charge & discharge, to protect the battery pack overcharge, over discharge, short circuit. Overall, the BMS helps to ensure safe and accurate running.

No	Item	Content	Criterion
4.1	Over charge		
		Over-charge protection for each cell	3.80±0.03V
		Over-charge release for each cell	3.60±0.05V
		Over-charge release method	Under the release voltage
4.2	Over discharge		
		Over-discharge protection each cell	2.00±0.05V
		Over-discharge release for each cell	2.30±0.10V
		Over-discharge release method	Charging
4.3	Over current		
		Discharge over current protection	350~450A, delay time 2~5s
4.4	Temperature	Discharge over current release	Charge or auto release after 1min
		Short circuit protection	Available
		Charge over temperature protection	Protect@65±5°C; Release@48±10°C;
		Charge under temperature protection	Protect@-5±3°C; Release@0±3°C

	Discharge over temperature protection	Protect@65±5°C; Release@48±10°C;
	Discharge under temperature protection	Protect@-20±3°C; Release@-15±3°C;

5. User guide

5.1 Product dimension

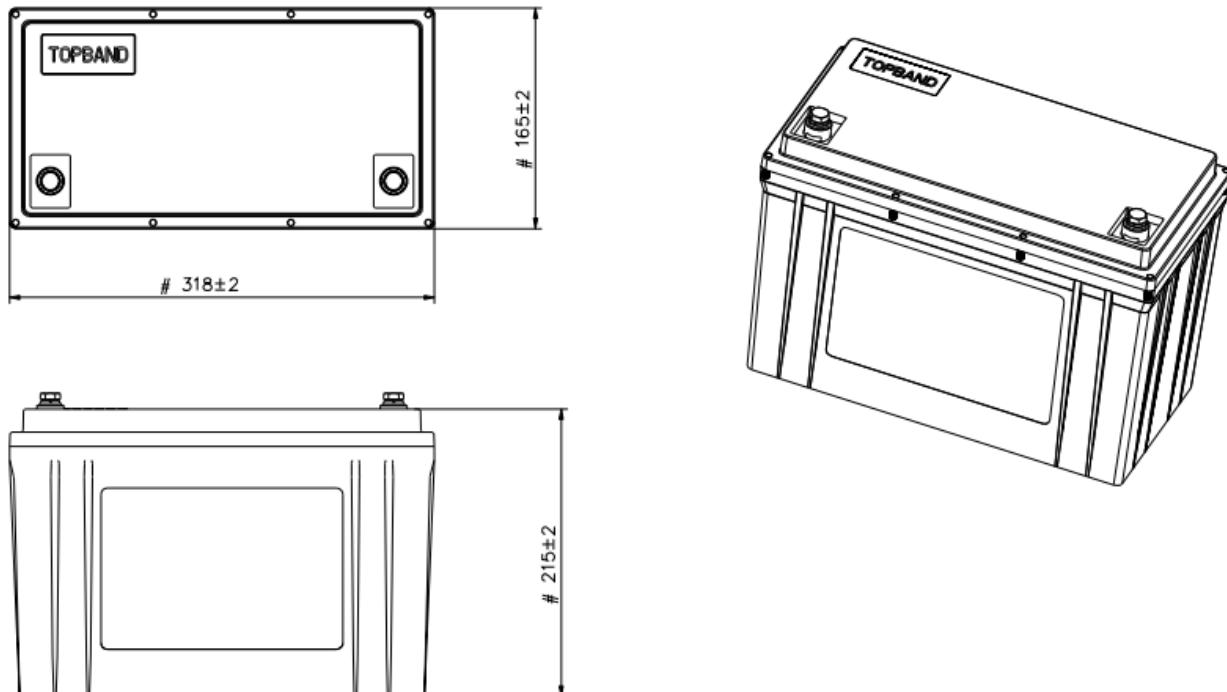

5.2 Transport & Store

The battery need to be charged every 6 months if out of use

No fall down, no pile up over 6 layers, and keep face up.

5.3 Warning & Tips.

Please read and follow the handling instructions before use. Improper use may cause heat, fire, rupture, damage or capacity deterioration of the battery. SHENZHEN TOPBAND BATTERY CO.,LTD. Describes is not responsible for any accidents caused by the usage without following our handling instructions.

Warning

* Battery must be far away from heat source, high voltage, and no exposed in sunshine for long time.

- * Never throw the battery into water or fire;
- * Never reverse two electrodes when use the battery;
- * Never connect the positive and negative of battery with metal;
- * Never knock, throw or trample the battery;
- * Never disassemble the battery without manufacturer's permission and guidance.

Never use mixed with other type of battery;

Tips

- * Keep the battery against high temperature. Otherwise it will cause battery heat, get into fire or lose some function and reduce the life.
- * When battery run out of power, please charge your battery timely (≤ 15 day).
- * Please use the matched or suggested charger for this battery.
- * If battery emit peculiar smell, heating, distortion or appear any abnormality, please stop using.
- * If the battery leaks and get into the eyes or skin, do not wipe, instead, rinse it with clean water and see doctor immediately.
- * Please far away from children or pets.