



GS Technical Data Sheet

GS HJ-S34B20L - Auxiliary, Backup & Specialist Batteries

Performance

Voltage	12V
Capacity (20-hour)	35Ah
Cold Cranking Amps (EN1)	272A

Dimensions

Length	197mm
Width	129mm
Height	227mm

Weights & Measures

Mean Weight with Acid	10.5kg
-----------------------	--------



Container Features

Case Type	B20 JIS AGM
Hold Down	N
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


Technology

Flame Arrestor	✓
Technology	Ca/Ca VRLA
Separator	AGM
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	2A
Performance Marking	W5-C2-V2-E2

Terminal Type


T3

Small Japanese
JIS Terminal



Positive Terminal Negative Terminal

Cell Assembly Layout

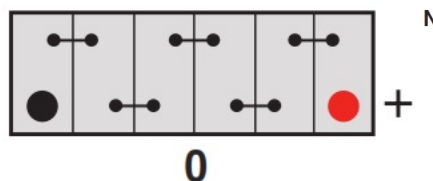

Battery Hold-down



Data Sheet generated on 12/09/2021 - E&OE