

1. Overview

25.6V100AH Module Specification


LFP24-100EV is Lithium iron phosphate battery module which designed for Telecom application. This battery module integrated with intelligent BMS inside, has big advantages on safety, cycle life, energy density, temperature range and environmental protection. This product specification describes the type, size, structure, electrochemistry performance, service life, and BMS characteristics.

2. Battery Module

The battery module consists of single LFP cells, wire, BMS and metal container.

- Packed with high performance LFP single cell, long life, safety and wide temperature range
- High energy density, small size, light weight, no pollution;
- Packing with single cell container, fire retardant wire and copper connecting bar, stable and safe.
- Built-in BMS, with battery voltage, current, temperature and health management.
- LBluetooth monitoring function.
- Below 0 ° C, charging heating is supported
- Flexible customization of dimensions
- 10 years design life, Stable performance, maintenance free.
- Do not allow more than 2 batteries in series. When the batteries are connected in series or parallel, fully charge them respectively. The maximum and minimum parallel voltages shall not exceed 0.3V.

► Pictures

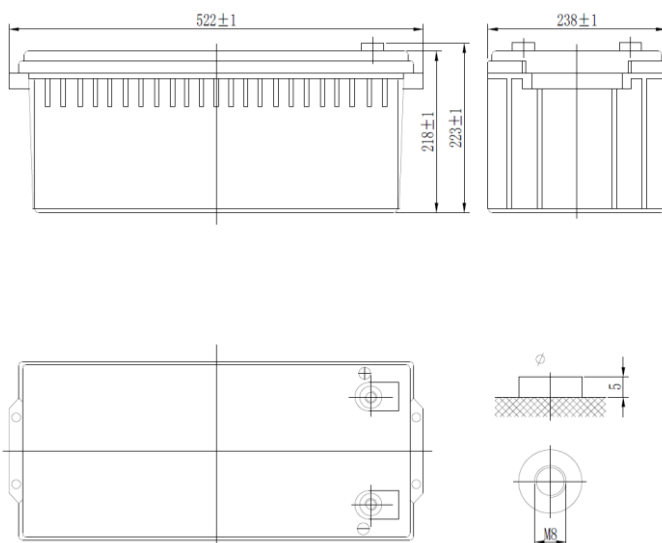

► Battery module specification

Item		Specification	Conditions
Nominal	Voltage	25.6V	25℃, 0.2C
	Capacity	100Ah	
Module weight		20kg	±0.5kg
Dimensions(W*D*H), mm		522x238x223	±2mm
Operating parameters	Charging Voltage	28.8V	
	Discharging Voltage	20V	Recommended
	Charging current	Max constant charge:100A	Recommended 20A
	Discharging current	Max constant discharge:100A	
		Pulse discharge: 150A for 10S	
Temperature	Charge range	-20℃~45℃	≤0℃, charging current needs to be ≥10A
	Discharge range	-20℃~60℃	
	Storage range	-20℃~45℃	
BMS	Built-in BMS	Voltage, current, temperature management & cell balance	communication
Service life	Design life	>10years	0.2C, 25℃
	Cycle life (90%DOD to 80% end)	>2000 times	
	Cycle life (100%DOD to 50% end)	>6000 cycles	@0.5C, 25℃

3. BMS specification

BMS provides complete management and protection for the battery.


- Voltage warning and protection for module and each single cell.
- Current warning and protection, and the maximum operating current can be customized.
- Temperature warning and protection, 1 sensors for battery pack and 1 sensor for BMS.

► **BMS parameters.**


Item		Parameters		Condition
Charge	Cell voltage protection	3.8V	Delay 1~2S	Recover when discharge current >1A or Cell voltage<3.6V or module voltage<28
	Module voltage protection	29.6V	Delay 1~2S	
	Over charging current 1	105A ~155A	Delay 10~20S	Turn to pre-charge mode and try to recover in every 3min
	Over charging current 2	≥155A	Delay 2~3S	
	Temperature protection	>70℃	Delay 1~2S	Recover when >0℃ or <60℃
Discharge	Cell voltage protection	2.1V		Recover when charge current >1A or Cell voltage>3.1V or module voltage>12V
	Module voltage protection	9.6V	Delay 1~2S	
	Over discharging current 1	105A~155A	Delay 10S	Recover when charging current>1A, or recover in every 60S
	Over discharging current 2	≥155A	Delay 2~3S	
	Short circuit	>300A	Delay 0.1mS	
	Temperature protection	<-20℃ or >75℃	Delay 1~2S	Recover when >-10℃ or <65℃
BMS	PCB Temp protection	>95℃	Delay 1~2S	Recover when <75℃
	Cell balance	100mA	Passive balance	Cell voltage difference > 40mV
	Temperature accuracy	± 2℃	Cycle measurement	Measuring range -40~100℃
	Voltage accuracy	± 20mV	Cycle measurement	For cells and module
	Current accuracy	FSC ± 5%	Cycle measurement	Measuring range -200~+200
	SOC	5%		Integral calculation
	Communication ports	bluetooth		Can be customized to match the device
	Heating function	0 ° C Enable the heating function. When the battery temperature is higher than 0 ° C, resume charging. Charging current ≥10A		

4. Battery module performance Curve


Self-discharge at different temperature

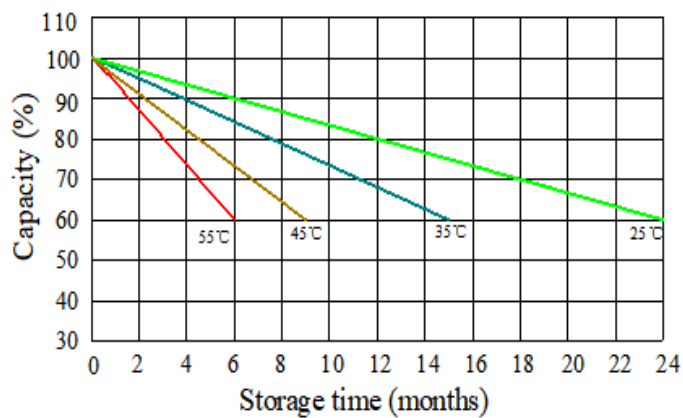


Temperature effects on capacity at 0.5C

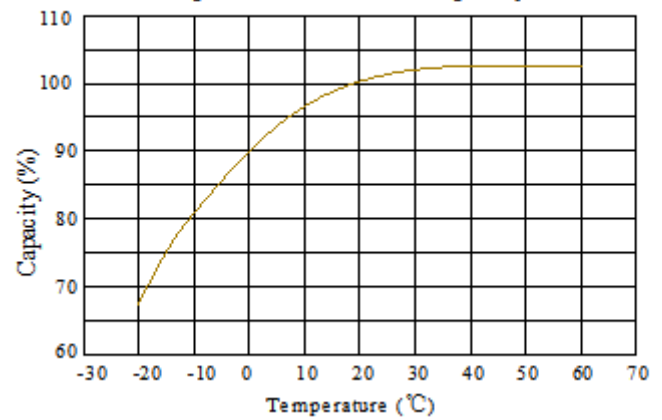

Discharge capacity with different temperature @ 0.5C

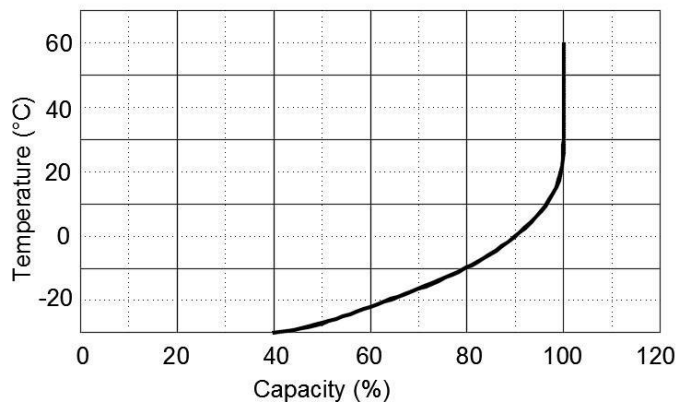

Cycle life with DOD @ 0.5C, 25°C

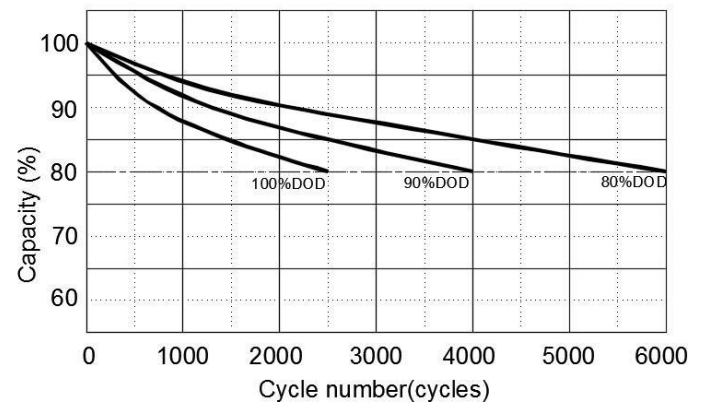

Performance may vary depending on, but not limited to cell usage and application. If cell is used outside specifications, performance will diminish. All specifications are subject to change without notice. All information provided herein is believed, but not guaranteed, to be current and accurate.