


设备用断路器 Circuit Breakers for Equipment
16系列

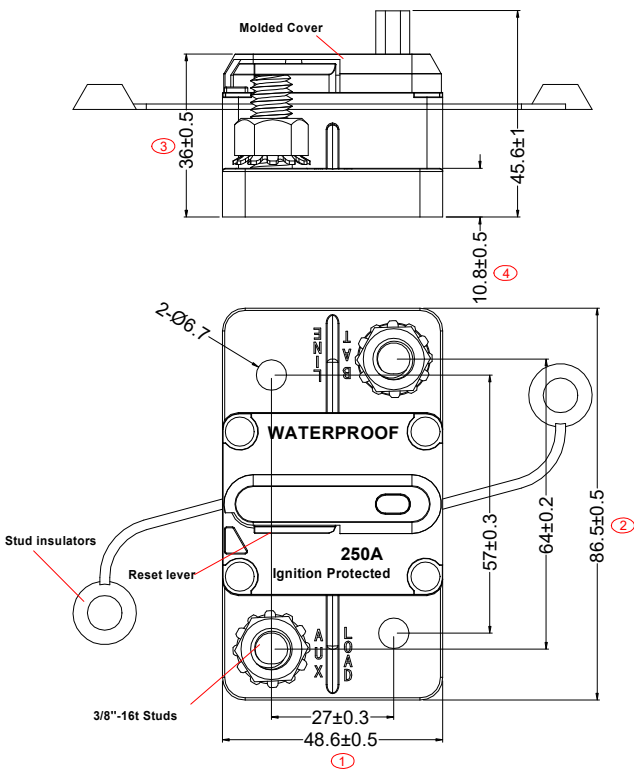


备注: (XX) 为重点控制尺寸。


Technical data

Rating:160-300A,32VDC.
Interrupt Rating:2,500A/32VDC.
Operating Temperature Rating:-30°C to 80°C.
Storage Temperature Rating:-30°C to 130°C.
Materials:UL-Rated 94V-0 Thermosetting plastics body.
Tin-plated copper alloy terminals. Nickel-plated copper alloy stud.
Insulation Resistance:500VDC>100MΩ.
Dielectric Strength:1800V 1 minute.
Stud: 20N.m MAX.
Mounting hole: 8N.m MAX.

Temperature Derating Curves

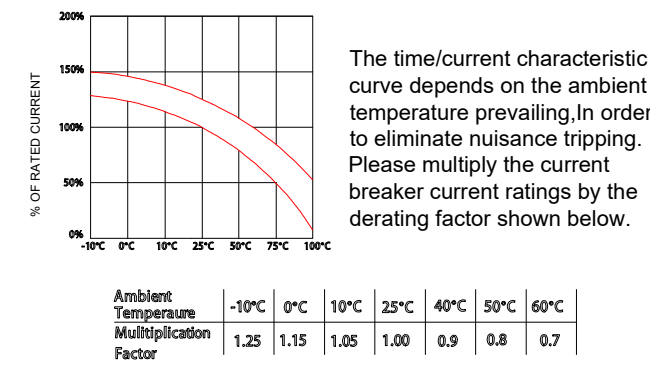

时间-电流特性曲线 (+25°C)

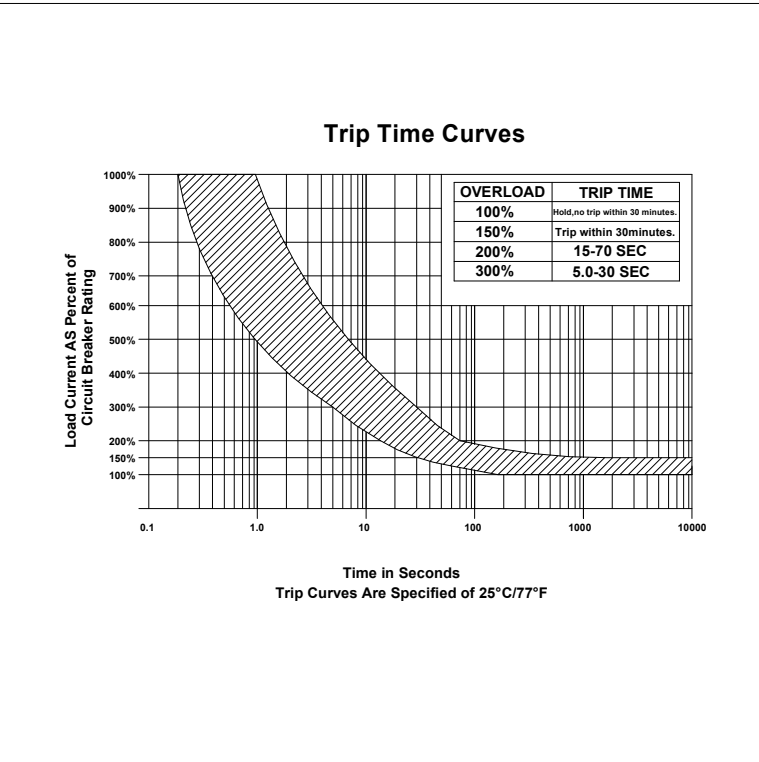

TOLERANCE		UNIT: MM	
DIMENSION	TOLERANCE	单重:	
≤10	±0.3	REV	A/0
>10	±0.5		
PART NO.		16-8F-250-LRW21	

批准: 日期: 审核: 日期: 拟制: PXC 日期:2026.08.14